

# STARGATE S4

## Structure

- Hot dip galvanized and painted steel structure
- Direct gantry drive with frequency converter
- High resistance rivets "aeronautic" type
- Stainless steel bolts

## Vertical brushes

- Hot dip galvanized steel single cross beam
- Electrical positioning drive
- Double cross over on front and back of the vehicle
- Double inclination and locking by cylinder
- Electronic power control

## Horizontal brush

- Electrical uplift with frequency converter
- Electronic power control
- Hot dip galvanized sliding guides
- Fall prevention system and belts loosening detection

## Drying

- Hot dip galvanized and painted contour following blade (2x3 kW)
- Flap tilting in 2 positions (optional)
- Electrical uplift with frequency converter
- Hot dip galvanized sliding guides
- Side drying 2 electric blowers (optional)
- Fall prevention system (with spring-loaded hook) and belts loosening detection

## High Pressure (optional)

- Side High Pressure
- Wheels High Pressure

## Standard equipment

- Hydraulic system with dedicated solenoid valves and piping
- Shampoo dosing pump
- Wax dosing pump
- Single festoon supply system (wall hanging)
- Control panel with display

Advanced technology for a lasting success and reliability.

## TECHNICAL FEATURES

### Machine dimensions (in millimetres)

Washing height	2.100	2.300	2.500	2.800	3.100
Machine height	2.970 (2.970*)	3.170 (2.970*)	3.370 (3.170*)	3.670 (3.470*)	3.970 (3.770*)
Machine width	3.560 - 3.680**				
Washing width	2.520				
Machine depth	1.650				
Machine weight (kg)	1.750	1.750	1.800	1.850	2.000
Distance between rails	3.000 (2.800 on request)				
Rails length	10.000	10.000	10.000	12.000	12.000

\*With horizontal brush at rest \*\*Dimensions at the wheel wash

### Technical data sheet

Drive speed	m/min	0-20
Water pressure	Bar	3-5
Pressione aria	Bar	8
Voltage	Hz	400 3/N/PE 50
Total power	kW	10 (16)
Control voltage	V	24
Drying power	kW	2x3 (2x3 top + 2x4 side)

( ) Side drying (optional)

### High pressure pumps (optional)


Water high pressure	Bar	80
---------------------	-----	----

Data are merely indicative and are not binding.



# STARGATE S4

The essence of the Car Wash

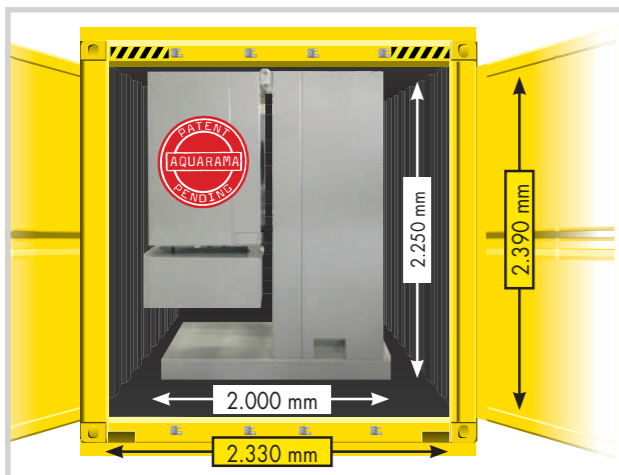

**Easy and cheap to carry!**  
**Easy and quick to install!**

**Plug&Play: it does not require any connection for electrical internal circuits!**

For the transport, the machine can be folded on itself (optional) without disassemble or disconnect it. The result is a matchless cheap transport and quick installation.

AQUARAMA Srl  
Località Piano, 38 - 12060 Novello (CN) - ITALIA  
Tel. +39 0173 776822 - Fax +39 0173 792501 - info@aquarama.it



Certificato  
Nr 50 100 7925



www.aquarama.it

Follow us on



# STARGATE S4

- Electrical movements
- Modern technology
- Right investment



### MAXIMUM SAFETY

Belts loosening detection. Fall prevention system of the drying blade (with spring-loaded hook) and of the horizontal brush.



### NEW CONCEPTION ELECTRIC MOTORS

Anti-corrosion alloy body and stainless steel shaft.



### TRAFFIC LIGHT

LED traffic light, completely deep in sealant resin, controlled by photocells or platform. The green arrows and the red stop provide the help for a perfect positioning of the vehicle.



### 2 POSITIONS TILTING FLAP

It allows a better care of car drying, in particular in the rear of the car.



### HIGH PRESSURE PUMP ON BOARD

42 lt/min - 80 bar integrated into the body of the gantry for an easier assembly and an excellent washing.



### WHEEL WASH

Available with telescopic brush, eventually with integrated HP, or rotating with high pressure, assisted by the distribution of chemical product at high concentration.



The gantry model shown is equipped with optional



### HIGH PRESSURE PUMPS CABINET/RACK

High pressure pumps system 84 lt/min (2x42) - 80 bar with tank, fitted in insulated stainless steel rack or cabinet.



### SELF-SERVICE SYSTEM


Console to start the self-service with possibility to add banknotes reader, coins, Smartcoin card, change dispenser, in galvanized and painted steel box, with security lock. The electronic control is strictly integrated with the machine PLC for an easier and more complete use.



### LOW MAINTENANCE THANKS TO SELF-LUBRICATING MATERIALS

Innovative materials for silent movements requiring no lubrication or maintenance.

### Washing width

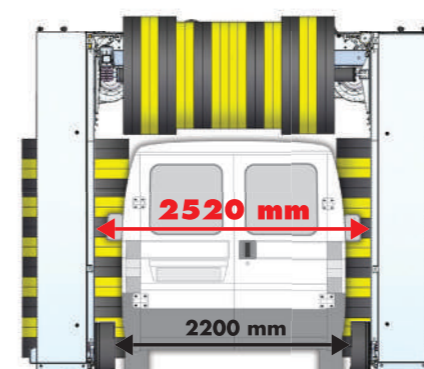

### Available washing heights

- 3100 mm
- 2800 mm
- 2500 mm
- 2300 mm
- 2100 mm